

U1210 Series

Handheld Clamp Meters

Introduction

Measurements of electrical distribution cables can be challenging and risky. For cables up to two inches in diameter, the Keysight Technologies, Inc. U1210 Series handheld clamp meters enable high-current measurements without breaking the circuit. Unlike most clamp meters, they also include Digital Multimeters (DMM) capabilities—resistance, capacitance, frequency, and temperature—to simplify troubleshooting during installation and maintenance. Best of all, they provide an extra layer of protection with CAT IV 600V and CAT III 1000 V safety ratings.

Notice: The U1211A will be discontinued and obsolete on August 1, 2023. Meanwhile, the U1212A and U1213A will be discontinued on June 1, 2024.



Features

- Large clamp opening of 52 mm or 2"
- High measurement capability of up to 1000 A for AC, DC or AC+DC
- CAT III 1000 V/CAT IV 600 V safety rating
- *Bluetooth*[®] wireless connectivity (optional U1177A Infrared (IR)-to-*Bluetooth* Adapter required)
- Includes full-featured DMM with resistance, capacitance, frequency, and temperature functions
- High-resolution measurements – measure current as low as 0.01 A
- Peak hold
- Dual ranging mode – manual and auto
- Large dual display
- Min/max recording capability.



Did you know?

Ensure that the clamp meter measures only one conductor at a time. Measuring multiple conductors may cause inaccuracy in measurement reading due to vector sum of the currents flowing in the conductors.



Figure 1. U1210 Series handheld clamp meter

Key Measurements

Measure current easily and accurately

Keysight U1210 Series handheld clamp meters come with a clamp opening of 52 mm/2 inches and a high current measurement capability of up to 1000 A (AC, DC, AC+ DC). With the large jaw size, these handhelds simplify current measurements for thick cables. Clamp-on with the U1210 Series and get convenience, versatility, and the ability to handle big currents—safely.



Figure 2. Large jaw clamp opening of 52mm / 2 inches

Full-featured digital multimeter functions

The U1210 Series handheld clamp meters provide basic functions of a multimeter with wide measurement ranges to cater to a broad range of applications (ACA, DCV, ACV, OHM, audible continuity, diode, and frequency tests). These meters also provide auto-ranging capability, built-in peak hold for in-rush current measurement, temperature and capacitance measurement capability, large backlight display, and one-hand operation.

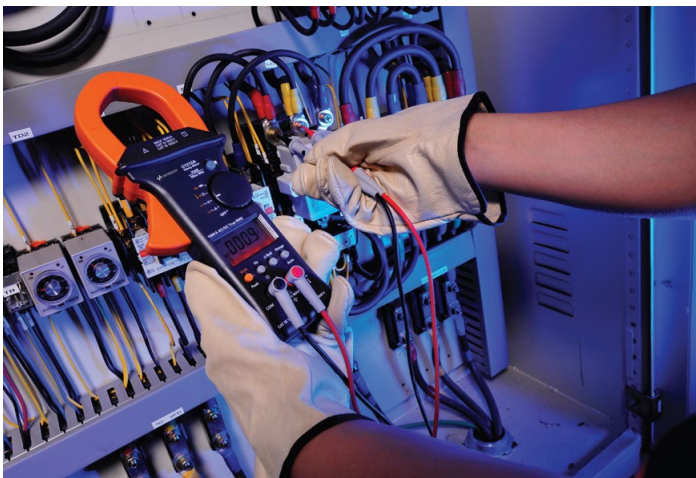


Figure 3. Full-featured digital multimeter functions

Smooth sailing measurements even in a distance

Making current measurements can be strenuously demanding due to its complexity and high current involved. Since electrical distribution rooms are typically located in separate locations, maintenance and troubleshooting are further complicated by the need to travel back and forth to cross-check the measurement results.

By adding the new *Bluetooth* capability to your existing U1210 series handheld clamp meters, you can make high current measurements more safely and conveniently. With the U1177A Infrared-to-*Bluetooth* adapter, you can easily monitor and log data up to a 10-meter range across all Android platform devices, providing an added benefit for maximum efficiency and productivity in a variety of difficult-to-reach environments.



Figure 4. Monitor measurements and log data up to 10-meters range across all Android platform devices with the U1177A Infrared-to-*Bluetooth* adapter.

Take a Closer Look



Figure 5. Front view of U1213A handheld clamp meter

General Specifications

| Title | Specification |
|------------------------------------|---|
| Dimension | <ul style="list-style-type: none"> • U1211A: 106 mm (W) X 273 mm (L) X 43 mm (H) • U1212A and U1213A: 106 mm (W) X 260 mm (L) X 43 mm (H) |
| Net Weight | <ul style="list-style-type: none"> • U1211A: 625 grams with batteries included • U1212A and U1213A: 525 grams with batteries included |
| Display | 4 digits with a maximum reading of 4,100 counts. The 12 Segments analog bar graph and full annunciator. Automatic polarity indication. |
| Battery | Standard 9 V Battery - Alkaline |
| Low battery indicator | Battery voltage drops below 6.0 V |
| Power consumption | <ul style="list-style-type: none"> • U1211A: 186 mVA maximum • U1212A and U1213A: 220 mVA maximum |
| Battery life | 60 hours (typical) |
| Connectivity | Wireless <i>Bluetooth</i> compatible |
| Maximum jaw opening | ~2 inches |
| Temperature coefficient | 0.12 x (specified accuracy)/°C (from 0 to 18 °C or 28 to 50 °C) |
| NMRR (Normal Mode Rejection Ratio) | This Series has an NMRR specification of > 60 dB at 50 Hz and 60 Hz, which means a good ability to reject the effect of AC noise in DC measurement |
| CMRR (Common Mode Rejection Ratio) | <ul style="list-style-type: none"> • U1211A and U1212A have CMRR specifications of > 60 dB at DC to 60 Hz in the ACV function: and > 80 dB at DC, 50 Hz, and 60 Hz in the DCV function. • U1213A has CMRR specifications of > 60 dB at DC to 60 Hz in the ACV function; and > 120 dB at DC, 50 Hz, and 60 Hz in the DCV function. |
| Operating temperature | -10 to 50 °C, 0 to 80 % R.H. |
| Storage temperature | -20 to 60 °C, 0 to 80 % R.H. |
| Relative Humidity (R.H.) | Maximum 80 % R.H. for temperature up to 31 °C decreasing linearly to 50 % R.H. at 50 °C |
| Temperature coefficient | 0.1 × (specified accuracy) / °C (from 0 °C to 18 °C or 28 °C to 50 °C) |
| Safety & EMC compliance | Refer to Declaration of Conformity for the latest revisions of regulatory compliance at www.keysight.com/go/conformity Note: If used in close proximity to an RF transmitter or when subjected to continuously present electromagnetic phenomena, some recoverable degradation of performance may occur. |
| Measurement category | CAT III 1000 V/ CAT IV 600 V |

Electrical Specifications for U1211A

Accuracy is given as \pm (% of reading + number of least significant digits) at $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$, with relative humidity less than 80 % R.H.

ACV/ ACA specifications are ac coupled, true R.M.S., and are valid from 5 % of range to 100 % of range. The crest factor may be up to 3.0 at full-scale except the 1000 V and 1000 A ranges, which are 1.5 at full scale. For non-sinusoidal waveforms, add (2 % reading + 2 % full scale) typical, for crest factors up to 3.

DC voltage

| Range | Resolution | Accuracy | Overload protection |
|--|------------|-----------|---------------------|
| 400 V | 0.1 V | 0.5 % + 5 | 1000 V R.M.S |
| 1000 V | 1 V | 0.5 % + 3 | |
| Input impedance: 10 M Ω (nominal) | | | |

AC Voltage

| Range | Resolution | Accuracy | Overload protection |
|--|------------|-----------|---------------------|
| | | 45~400 Hz | |
| 400 V | 0.1 V | 1 % + 5 | 1000 V R.M.S |
| 1000 V | 1 V | 1 % + 5 | |
| Input impedance: 10 M Ω (nominal) in parallel with < 100 pF | | | |

Voltage (1 ms peak hold)

| Range | Resolution | Accuracy | Overload protection |
|---|------------|----------|---------------------|
| 400 V | 0.1 V | 1 % + 43 | 1000 V R.M.S |
| 1000 V | 1 V | 1 % + 43 | |
| Specified accuracy for changes > 1 ms in duration | | | |

Diode check/audible continuity test

| Range | Resolution | Accuracy | Test current | Open voltage |
|--|------------|-----------|----------------------|--------------|
| Diode | 0.001 V | 0.5 % + 2 | Approximately 0.8 mA | < +3.1 V |
| <ul style="list-style-type: none"> Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current The built-in buzzer sounds when reading is below 50 mV approximately and single tone for normal forward-biased diode or semiconductor junction as $0.3\text{ V} \leq \text{Reading} \leq 0.8\text{ V}$ | | | | |

Resistance

| Range | Resolution | Accuracy | Test current |
|-------|------------|-----------|--------------|
| 400 Ω | 0.1 Ω | 0.5 % + 3 | 0.8 mA |
| 4 kΩ | 0.001 kΩ | 0.5 % + 3 | 80 μA |

Notes:

1. Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
2. Maximum open voltage: < +3.1 V
3. Instant continuity: Built-in buzzer sounds when resistance is less than 10.0 Ω
4. The accuracy of 400 Ω and 4 kΩ is specified after Relative function, which is used to substrate the test lead resistance and the thermal effect

Capacitance

| Range | Resolution | Accuracy | Overload protection |
|---------|------------|----------|---|
| 400 μF | 0.1 μF | 2 % + 4 | 1000 V R.M.S. for circuits < 0.3 A of short circuit current |
| 4000 μF | 1 μF | 3 % + 4 | |

The accuracy is based on film capacitor or better and use Relative mode to zero residual value

AC Current

| Range | Resolution | Accuracy *N1 | | |
|------------|------------|--------------|------------|--------------|
| | | 45~65 Hz | 65~400 Hz | 400 Hz~1 kHz |
| 40 A | 0.01 A | 1.0 % + 10 | 1.0 % + 10 | 3.0 % + 10 |
| 400 A | 0.1 A | 1.0 % + 5 | 1.0 % + 5 | 3.0 % + 5 |
| 400~700 A | 1 A | 1.0 % + 5 | 1.0 % + 5 | 3.0 % + 5 |
| 700~1000 A | 1 A | 1.0 % + 5 | None | None |

- Maximum overload: 1000 A R.M.S. The accuracy is specified on the symmetrical waveforms.
- N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

| WARNING: The measuring duty cycle should not exceed the following limits. | |
|---|-------------------------------|
| 0 ~ 600 A R.M.S. | Continuous |
| 600 ~ 700 A R.M.S. | 10 minutes ON, 10 minutes OFF |
| 700 ~ 1000 A R.M.S. | 5 minutes ON, 20 minutes OFF |

Current (1 ms peak hold)

| Range | Resolution | Accuracy | Maximum overload |
|---|------------|------------|------------------|
| 40 A | 0.01 A | 2.0 % + 70 | 1000 A R.M.S. |
| 400 A | 0.1 A | 2.0 % + 43 | |
| 1000 A | 1 A | 2.0 % + 43 | |
| Specified accuracy for changes > 1 ms in duration | | | |

Frequency (AC coupling)

| Range | Resolution | Accuracy | Minimum frequency |
|--|------------|-----------|-------------------|
| 99.99 Hz | 0.01 Hz | 0.2 % + 3 | 10 Hz |
| 999.9 Hz | 0.1 Hz | | |
| 9.999 kHz | 0.001 kHz | | |
| 99.99 kHz | 0.01 kHz | | |
| 999.9 kHz | 0.1 kHz | | |
| Overload protection: 1000 V; < 20,000,000 V x Hz | | | |

Sensitivity

| Frequency sensitivity | | |
|--|------------------------------|-----------------------|
| Range | Minimum sensitivity (R.M.S.) | |
| Maximum input for specified accuracy of AC | 40 Hz~2 kHz | 10~40 Hz or 2~100 kHz |
| 400 V | 6 V | 6 V |
| 1000 V | 20 V | 30 V (< 10 kHz) |
| 40 A | 3 A (< 1 kHz) | 3 A (< 1 kHz) |
| 400 A | 20 A (< 1 kHz) | 20 A (< 1 kHz) |
| 1000 A | 50 A (1 kHz) | 50 A (< 1 kHz) |

Electrical Specifications for U1212A

Accuracy is given as \pm (% of reading + number of least significant digits) at $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$, with relative humidity less than 80 % R.H.

ACV/ ACA specifications are ac coupled, true R.M.S., and are valid from 5 % of range to 100 % of range. The crest factor may be up to 3.0 at full-scale except the 1000 V and 1000 A ranges, which are 1.5 at full scale. For non-sinusoidal waveforms, add (2 % reading + 2 % full scale) typical, for crest factors up to 3.

DC voltage

| Range | Resolution | Accuracy | Overload protection |
|--|------------|-----------|---------------------|
| 400 V | 0.1 V | 0.5 % + 3 | 1000 V R.M.S |
| 1000 V | 1 V | 0.5 % + 3 | |
| Input impedance: 10 M Ω (nominal) | | | |

AC voltage

| Range | Resolution | Accuracy | Overload protection |
|--|------------|-----------|---------------------|
| | | 45~400 Hz | |
| 400 V | 0.1 V | 1 % + 5 | 1000 V R.M.S |
| 1000 V | 1 V | 1 % + 5 | |
| Input impedance: 10 M Ω (nominal) in parallel with < 100 pF | | | |

Voltage (1 ms peak hold)

| Range | Resolution | Accuracy | Overload protection |
|---|------------|----------|---------------------|
| 400 V | 0.1 V | 1 % + 43 | 1000 V R.M.S |
| 1000 V | 1 V | 1 % + 43 | |
| Specified accuracy for changes > 1 ms in duration | | | |

Diode check/audible continuity test

| Range | Resolution | Accuracy | Test current | Open voltage |
|--|------------|-----------|----------------------|--------------|
| Diode | 0.001 V | 0.5 % + 2 | Approximately 0.8 mA | < +3.1 V |
| <ul style="list-style-type: none"> Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current The built-in buzzer sounds when reading is below 50 mV approximately and single tone for normal forward-biased diode or semiconductor junction as $0.3\text{ V} \leq \text{Reading} \leq 0.8\text{ V}$ | | | | |

Resistance

| Range | Resolution | Accuracy | Test current |
|--------------|------------------|-----------|--------------|
| 400 Ω | 0.1 Ω | 0.5 % + 3 | 0.8 mA |
| 4 k Ω | 0.001 k Ω | 0.5 % + 3 | 80 μ A |

Notes:

1. Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
2. Maximum open voltage: < +3.1 V
3. Instant continuity: Built-in buzzer sounds when resistance is less than 10.0 Ω
4. The accuracy of 400 Ω and 4 k Ω is specified after Relative function, which is used to substrate the test lead resistance and the thermal effect

Capacitance

| Range | Resolution | Accuracy | Overload protection |
|--------------|-------------|----------|--|
| 400 μ F | 0.1 μ F | 2 % + 4 | 1000 V R.M.S. for circuits < 0.3 A of short circuit current |
| 4000 μ F | 1 μ F | 3 % + 4 | |

The accuracy is based on film capacitor or better and use Relative mode to zero residual value

DC Current

| Range | Resolution | Accuracy | Maximum overload |
|--------|------------|------------|------------------|
| 40 A | 0.01 A | 1.5 % + 15 | 1000 A R.M.S. |
| 400 A | 0.1 A | 1.5 % + 3 | |
| 1000 A | 1 A | 2.0 % + 5 | |

Use Relative mode to zero residual offset

AC Current

| Range | Resolution | Accuracy *N1 | | | | Maximum overload |
|--------|------------|--------------|------------|------------|------------|------------------|
| | | 45~65 Hz | 65~200 Hz | 200~300 Hz | 300~400 Hz | |
| 40 A | 0.01 A | 2.0 % + 10 | 3.0 % + 10 | 3.5 % + 10 | 6.5 % + 10 | 1000 A R.M.S. |
| 400 A | 0.1 A | 2.0 % + 5 | 3.0 % + 5 | 3.5 % + 5 | 6.5 % + 5 | |
| 1000 A | 1 A | 2.5 % + 5 | 3.0 % + 5 | 3.5 % + 5 | 6.5 % + 5 | |

N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

Current (1 ms peak hold)

| Range | Resolution | Accuracy | Maximum overload |
|--------|------------|------------|------------------|
| 40 A | 0.01 A | 2.0 % + 70 | 1000 A R.M.S. |
| 400 A | 0.1 A | 2.0 % + 43 | |
| 1000 A | 1 A | 2.0 % + 43 | |

Specified accuracy for changes > 1 ms in duration

Temperature test

| Thermal type | Range | Resolution | Accuracy |
|--------------|---------------|------------|------------|
| K | -200 ~ -40 °C | 0.1 °C | 1 % + 3 °C |
| | -40 ~ 1372 °C | 0.1 °C | 1 % + 1 °C |
| | -328 ~ -40 °F | 0.1 °F | 1 % + 6 °F |
| | -40 ~ 2502 °F | 0.1 °F | 1 % + 2 °F |

Notes:

- The accuracy does not include the tolerance of the thermocouple probe, and the meter must be operational for at least one hour
- Do not allow the temperature sensor to contact a surface that is energized above 33 V R.M.S. or 70 V DC. Such voltages will pose a shock hazard.
- The temperature calculation is according to the standard of EN/IEC-60548-1 and NIST175

Frequency (AC coupling)

| Range | Resolution | Accuracy | Minimum frequency |
|-----------|------------|-----------|-------------------|
| 99.99 Hz | 0.01 Hz | 0.2 % + 3 | 10 Hz |
| 999.9 Hz | 0.1 Hz | | |
| 9.999 kHz | 0.001 kHz | | |
| 99.99 kHz | 0.01 kHz | | |
| 999.9 kHz | 0.1 kHz | | |

Overload protection: 1000 V

Sensitivity

| Frequency sensitivity | | |
|--|------------------------------|-----------------------|
| Range | Minimum sensitivity (R.M.S.) | |
| Maximum input for specified accuracy of AC | 40 Hz~2 kHz | 10~40 Hz or 2~100 kHz |
| 400 V | 6 V | 6 V |
| 1000 V | 20 V | 30 V (< 10 kHz) |
| 40 A | 3 A (< 1 kHz) | 3 A (< 1 kHz) |
| 400 A | 20 A (< 1 kHz) | 20 A (< 1 kHz) |
| 1000 A | 50 A (1 kHz) | 50 A (< 1 kHz) |

Electrical Specifications for U1213A

Accuracy is given as \pm (% of reading + number of least significant digits) at $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$, with relative humidity less than 80 % R.H.

AC voltage, AC current, AC+DC voltage, AC+DC current specifications are ac coupled, true R.M.S. and are valid from 5 % of range to 100 % of range. The crest factor may be up to 3.0 at full-scale except the 1000 V and 1000 A ranges, which are 1.5 at full scale. For non-sinusoidal waveforms, add (2 % reading + 2 % full scale) typical, for crest factors up to 3.

DC voltage

| Range | Resolution | Accuracy | Overload protection |
|--------|------------|-----------|---------------------|
| 4 V | 0.001 V | 0.2 % + 5 | 1000 A.R.M.S. |
| 40 V | 0.01 V | | |
| 400 V | 0.1 V | | |
| 1000 V | 1 V | 0.5 % + 3 | |

Input impedance: 10 M Ω (nominal)

AC Voltage

| Range | Resolution | Accuracy | | Overload protection |
|--------|------------|-----------|--------------|---------------------|
| | | 45~400 Hz | 400 Hz~2 kHz | |
| 4 V | 0.001 V | 1.0 % + 5 | 2.0 % + 5 | 1000 V R.M.S |
| 40 V | 0.01 V | | | |
| 400 V | 0.1 V | | | |
| 1000 V | 1 V | | | |

Input impedance: 10 M Ω (nominal) in parallel with < 100 pF

AC+DC voltage

| Range | Resolution | Accuracy | | Overload protection |
|--------|------------|-----------|--------------|---------------------|
| | | 45~400 Hz | 400 Hz~2 kHz | |
| 4 V | 0.001 V | 1.5 % + 9 | 2.5 % + 9 | 1000 V R.M.S |
| 40 V | 0.01 V | | | |
| 400 V | 0.1 V | | | |
| 1000 V | 1 V | | | |

Input impedance: 10 M Ω (nominal) in parallel with < 100 pF

Voltage (1 ms peak hold)

| Range | Resolution | Accuracy | Overload protection |
|--------|------------|------------|---------------------|
| 4 V | 0.001 V | 1.0 % + 43 | 1000 V R.M.S |
| 40 V | 0.01 V | | |
| 400 V | 0.1 V | | |
| 1000 V | 1 V | | |

Specified accuracy for changes > 1 ms in duration

Diode check/audible continuity test

| Range | Resolution | Accuracy | Test current | Open voltage |
|-------|------------|-----------|----------------------|--------------|
| Diode | 0.001 V | 0.5 % + 2 | Approximately 0.8 mA | < +3.1 V |

- Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
- The built-in buzzer sounds when reading is below 50 mV approximately and single tone for normal forward-biased diode or semiconductor junction as $0.3 \text{ V} \leq \text{Reading} \leq 0.8 \text{ V}$

Resistance

| Range | Resolution | Accuracy | Test current |
|----------------|------------------|-----------|--------------|
| 400 Ω | 0.1 Ω | 0.3 % + 3 | 0.8 mA |
| 4 k Ω | 0.001 k Ω | | 80 μ A |
| 40 k Ω | 0.01 k Ω | | 8 μ A |
| 400 k Ω | 0.1 k Ω | | 727 nA |
| 4 M Ω | 0.001 M Ω | 0.6 % + 3 | 112 nA |
| 40 M Ω | 0.01 M Ω | 2.0 % + 5 | 112 nA |

Notes:

1. Overload protection: 1000 V R.M.S. for circuits < 0.3 A of short circuit current
2. Maximum open voltage: < +3.1 V
3. Instant continuity: Built-in buzzer sounds when resistance is less than 10.0 Ω
4. The accuracy of 400 Ω and 4 k Ω is specified after Relative function, which is used to substrate the test lead resistance and the thermal effect

Capacitance

| Range | Resolution | Accuracy | Overload protection |
|--------------|---------------|----------|---|
| 4 μ F | 0.001 μ F | 1 % + 4 | 1000 V R.M.S. for circuits < 0.3 A of short circuit current |
| 40 μ F | 0.01 μ F | | |
| 400 μ F | 0.1 μ F | 2 % + 4 | |
| 4000 μ F | 1 μ F | 3 % + 4 | |

The accuracy is based on film capacitor or better and use Relative mode to zero residual value

DC current

| Range | Resolution | Accuracy | Maximum overload |
|--------|------------|------------|------------------|
| 40 A | 0.01 A | 1.5 % + 15 | 1000 A R.M.S. |
| 400 A | 0.1 A | 1.5 % + 3 | |
| 1000 A | 1 A | 2.0 % + 5 | |

Use Relative mode to zero residual offset

AC Current

| Range | Resolution | Accuracy *N1 | | | | Maximum overload |
|--------|------------|--------------|-------------|--------------|--------------|------------------|
| | | 45 ~ 65 Hz | 65 ~ 200 Hz | 200 ~ 300 Hz | 300 ~ 400 Hz | |
| 40 A | 0.01 A | 2.0 % + 10 | 3.0 % + 10 | 3.5 % + 10 | 6.5 % + 10 | 1000 A R.M.S. |
| 400 A | 0.1 A | 2.0 % + 5 | 3.0 % + 5 | 3.5 % + 5 | 6.5 % + 5 | |
| 1000 A | 1 A | 2.0 % + 5 | 3.0 % + 5 | 3.5 % + 5 | 6.5 % + 5 | |

N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

AC+DC current

| Range | Resolution | Accuracy *N1 | | | | Maximum overload |
|--------|------------|--------------|-------------|--------------|--------------|------------------|
| | | 45 ~ 65 Hz | 65 ~ 200 Hz | 200 ~ 300 Hz | 300 ~ 400 Hz | |
| 40 A | 0.01 A | 3.5 % + 25 | 4.5 % + 25 | 5.0 % + 25 | 8.0 % + 25 | 1000 A R.M.S. |
| 400 A | 0.1 A | 3.5 % + 9 | 4.5 % + 9 | 5.0 % + 9 | 8.0 % + 9 | |
| 1000 A | 1 A | 4.5 % + 9 | 5.0 % + 9 | 5.5 % + 9 | 8.5 % + 9 | |

N1: The maximum verification of current and frequency product is less than 400,000 A x Hz

Current (1 ms peak hold)

| Range | Resolution | Accuracy | Maximum overload |
|--------|------------|------------|------------------|
| 40 A | 0.01 A | 2.0 % + 70 | 1000 A R.M.S. |
| 400 A | 0.1 A | 2.0 % + 43 | |
| 1000 A | 1 A | 2.0 % + 43 | |

Specified accuracy for changes > 1 ms in duration

Temperature test

| Thermal type | Range | Resolution | Accuracy |
|--------------|---------------|------------|------------|
| K | -200 ~ -40 °C | 0.1 °C | 1 % + 3 °C |
| | -40 ~ 1372 °C | 0.1 °C | 1 % + 1 °C |
| | -328 ~ -40 °F | 0.1 °F | 1 % + 6 °F |
| | -40 ~ 2502 °F | 0.1 °F | 1 % + 2 °F |

Notes:

1. The accuracy does not include the tolerance of the thermocouple probe, and the meter must be operational for at least one hour
2. Do not allow the temperature sensor to contact a surface that is energized above 33 V R.M.S. or 70 V DC. Such voltages will pose a shock hazard.
3. The temperature calculation is according to the standard of EN/IEC-60548-1 and NIST175

Frequency (AC coupling)

| Range | Resolution | Accuracy | Minimum frequency |
|-----------|------------|-----------|-------------------|
| 99.99 Hz | 0.01 Hz | 0.2 % + 3 | 10 Hz |
| 999.9 Hz | 0.1 Hz | | |
| 9.999 kHz | 0.001 kHz | | |
| 99.99 kHz | 0.01 kHz | | |
| 999.9 kHz | 0.1 kHz | | |

Overload protection: 1000 V; < 20,000,000 V x Hz

Sensitivity

| Frequency sensitivity | | |
|--|------------------------------|------------------|
| Range | Minimum sensitivity (R.M.S.) | |
| Maximum input for specified accuracy of AC | 45 Hz~2 kHz | 10 Hz~200 kHz |
| 4 V | 0.3 V | 0.6 V |
| 40 V | 2 V | 3 V |
| 400 V | 20 V | 30 V (< 100 kHz) |
| 1000 V | 50 V | 50 V (< 10 kHz) |
| 40 A | 3 A (< 1 kHz) | 3 A (< 1 kHz) |
| 400 A | 20 A (< 1 kHz) | 20 A (< 1 kHz) |
| 1000 A | 50 A (< 1 kHz) | 50 A (< 1 kHz) |






Duty cycle

| Mode | Range | Accuracy of full scale |
|-------------|--------------|------------------------|
| AC coupling | 0.1 %~99.9 % | 0.3 % per kHz + 0.3 % |

Notes:

1. The accuracy for the duty cycle is based on a 4 V square wave input to the DC 4 V range and maximum frequency up to 2 kHz. The duty cycle range can be measured within 5 %~95 % as the signal frequency > 20 Hz.

Order Information

| Optional accessories | | |
|----------------------|--|-------------------------------------|
| U1168A |  | Standard test lead kit |
| U1162A |  | Alligator clips |
| U1175A |  | Soft carrying case |
| U1186A |  | K-type thermocouple and adapter |
| U1177A |  | Infrared (IR)-to-Bluetooth® Adapter |

Bluetooth® and the Bluetooth® logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Keysight Technologies is under license.

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications, or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus



Find us at www.keysight.com

This information is subject to change without notice. © Keysight Technologies, 2017 - 2023, Published in USA, October 27, 2023, 5990-5083EN

Page 17