

APPROVAL SHEET

ITEM	:	SMD POWER INDUCTOR
P/NO	:	HTOP5845-2.2mH(222K)
DATE	:	2015-05-26

APPROVED	REFEERENCE

HANTER ELECTRONICS IND CO.,LTD
JIANGNAN ZHUANG, WEISHAN TOWN WENDENG CITY
SHANDONG, CHINA


改訂 REV.	設計變更 ENG.CHANGE	日付 DATE	作成 DRAWN	檢認 APPD.
------------	--------------------	------------	-------------	-------------

Record of Revisions				
Rev No.	Rev Date	Revision Contents	Reason of Rev.	Marking Method
REV.0	2015.5.12	신규		


QUALITY & DEVELOPMENT TEAM				尺圖 SCALE	SMD INDUCTOR for POWER LINE
擔當 DRAWN	設計 DESIGNED	檢認 CHECKED	承認 APPROVED	/ NTS	
				DIM. mm	
				HTOP5845-222K	1 / 5

改訂 REV.	設計變更 ENG.CHANGE	日付 DATE	作成 DRAWN	檢認 APPD.
------------	--------------------	------------	-------------	-------------


1. DIMENSION (UNIT : mm)

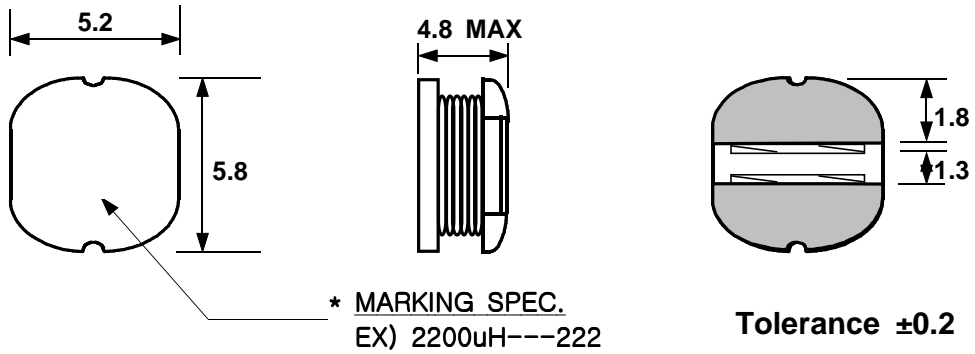

2. CONNECTION

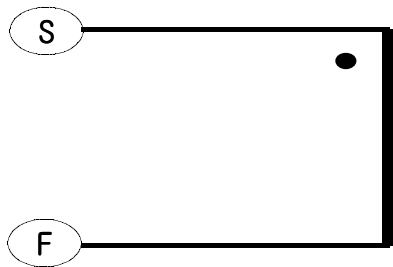

3. PCB-LAND PATTERN

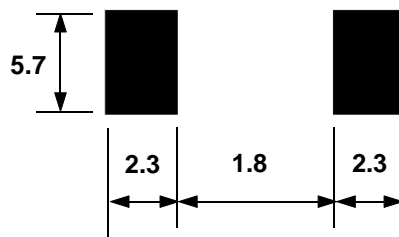

QUALITY & DEVELOPMENT TEAM				尺圖 SCALE	SMD INDUCTOR for POWER LINE
擔當 DRAWN	設計 DESIGNED	檢認 CHECKED	承認 APPROVED	/ NTS	
				DIM. mm	
HTOP5845-222K					2 / 5


改訂 REV.	設計變更 ENG.CHANGE	日付 DATE	作成 DRAWN	檢認 APPD.
------------	--------------------	------------	-------------	-------------

4. ELECTRICAL PERFORMANCE

P/NO.	INDUCTANCE [uH±20%]	DC RESISTANCE [Ω MAX]	RATED CURRENT [mA MAX]	MARKING
HTOP5845-222K	2200uH	16	170	222

- * INDUCTANCE : HP-4284A LCR METER at 1kHz, 1V.
- * DC RESISTANCE : HIOKI 3220mΩHI TESTER.
- * RATED CURRENT : The maximum DC value having inductance decrease within 20% and Temperature increase within 40°C by the application of DC bias.

5. INTERNAL CONSTRUCTION & MATERIAL LIST


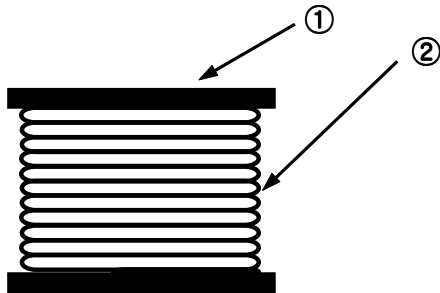


NO.	PART NAME	MATERIAL
1	CORE	FERRITE
2	WIRE	UEW or eqv.

QUALITY & DEVELOPMENT TEAM				尺圖 SCALE	SMD INDUCTOR for POWER LINE
擔當 DRAWN	設計 DESIGNED	檢認 CHECKED	承認 APPROVED	/ NTS	
				DIM. mm	
				HTOP5845-222K	3 / 5

改訂 REV.	設計變更 ENG.CHANGE	日付 DATE	作成 DRAWN	檢認 APPD.
------------	--------------------	------------	-------------	-------------

6. RELIABILITY DATA

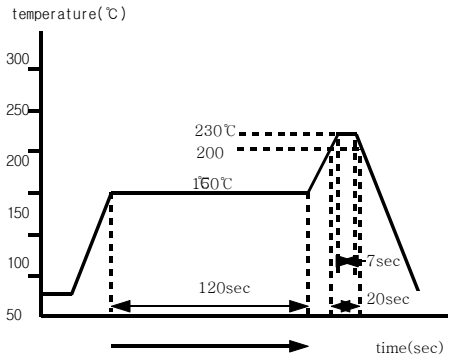
NO	ITEM	SPECIFICATION	TEST METHOD & CONDITION
1	Operating temperature range	-25 to +85℃	Including temperature rise due to self-generated heat.
2	Storage temperature range	-40 to +85℃	
3	Insulation resistance	100MΩ min.	100VDC for 1min. between coil & core.
4	High Temperature	Inductance change : within ±10%	85℃ 96 Hours.
5	Low Temperature		-25℃ 96 Hours.
6	Humidity		40±2℃ 90~95% 500 Hours.
7	Thermal shock		-25±3℃ 30 Minutes Room Temp. Within 5 Minutes 85±2℃ 30 Minutes : 5 cycle
8	Vibration	Inductance change : within ±5%	vibration for 2hours in each of three orientations at sweep vibration 10 to 55 to 10Hz with 1.5mm P-P amplitude .
9	Solderability	Wetting shall cover less than 75% of each terminal	Solder temperature : 260 ±5℃ Duration : 3 ±2sec.
10	Resistance to soldering heat	No mechanical defect and inductance change : within ±5%	Soler temperature : 260 ±5℃ Duration : 10 ±2sec.
11	Terminal strength	0.5kg for 10 ±1 seconds. Terminal should not peel off	 <p>After soldering between copper plate and terminals of x,y with standing at below conditions</p>
12	Reflow condition	No mechanical defect and No Inductance defect	 <p>Reflow condition</p>

※ Measure after leave 2hours in standard condition(No 4~8).


QUALITY & DEVELOPMENT TEAM				尺圖 SCALE		SMD INDUCTOR for POWER LINE
擔當 DRAWN	設計 DESIGNED	檢認 CHECKED	承認 APPROVED	/	NTS	
 				DIM.	mm	
				HTOP5845-222K		

改訂 REV.	設計變更 ENG.CHANGE	日付 DATE	作成 DRAWN	檢認 APPD.
------------	--------------------	------------	-------------	-------------

7. PACKING SPEC.

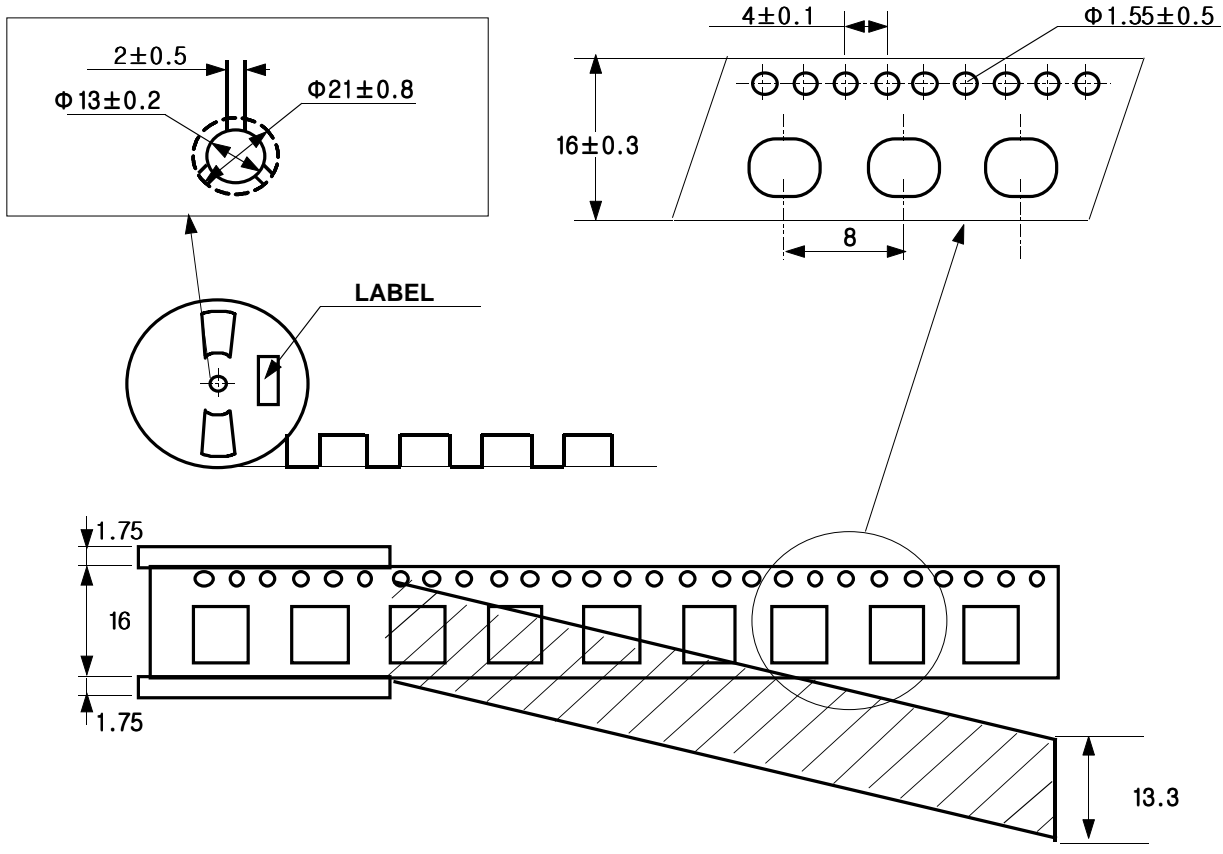

TAPE PITCH	8mm
EMBOSE TAPE	16mm
REEL	$\Phi 330 \pm 2\text{mm}$
QUANTITY	1000 pcs
REEL TAPE MARGIN	START : 200mm MIN FINISH : 200mm MIN
COVER TAPE	13.3mm

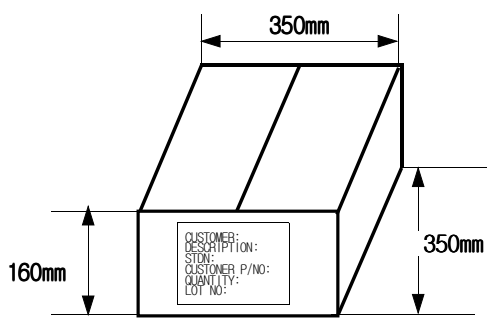

QUALITY & DEVELOPMENT TEAM				尺圖 SCALE	SMD INDUCTOR for POWER LINE
擔當 DRAWN	設計 DESIGNED	檢認 CHECKED	承認 APPROVED	/ NTS	
				DIM. mm	
				HTOP5845-222K	5 / 5