


## PARAMETERS

| Single Output | Triple Output   |
|---------------|-----------------|
| +Vin          | 1. +Vin         |
| -Vin          | 2. -Vin         |
| No Pin        | 3. No Pin       |
| CNT (Enable)  | 4. CNT (Enable) |
| Output1       | 5. Output2      |
| COM           | 6. Output1      |
| Output2       | 7. GND          |
| TRM           | 8. Output3      |

## PARTS

| VR          | R1             | R2           |
|-------------|----------------|--------------|
| 1k $\Omega$ | 1.0k $\Omega$  | 680 $\Omega$ |
| 1k $\Omega$ | 3.9k $\Omega$  | 680 $\Omega$ |
| 1k $\Omega$ | 5.6k $\Omega$  | 680 $\Omega$ |
| 1k $\Omega$ | 3.3k $\Omega$  | 680 $\Omega$ |
| 5k $\Omega$ | 9.0k $\Omega$  | 820 $\Omega$ |
| 5k $\Omega$ | 20.0k $\Omega$ | 910 $\Omega$ |

## DIMENSIONS

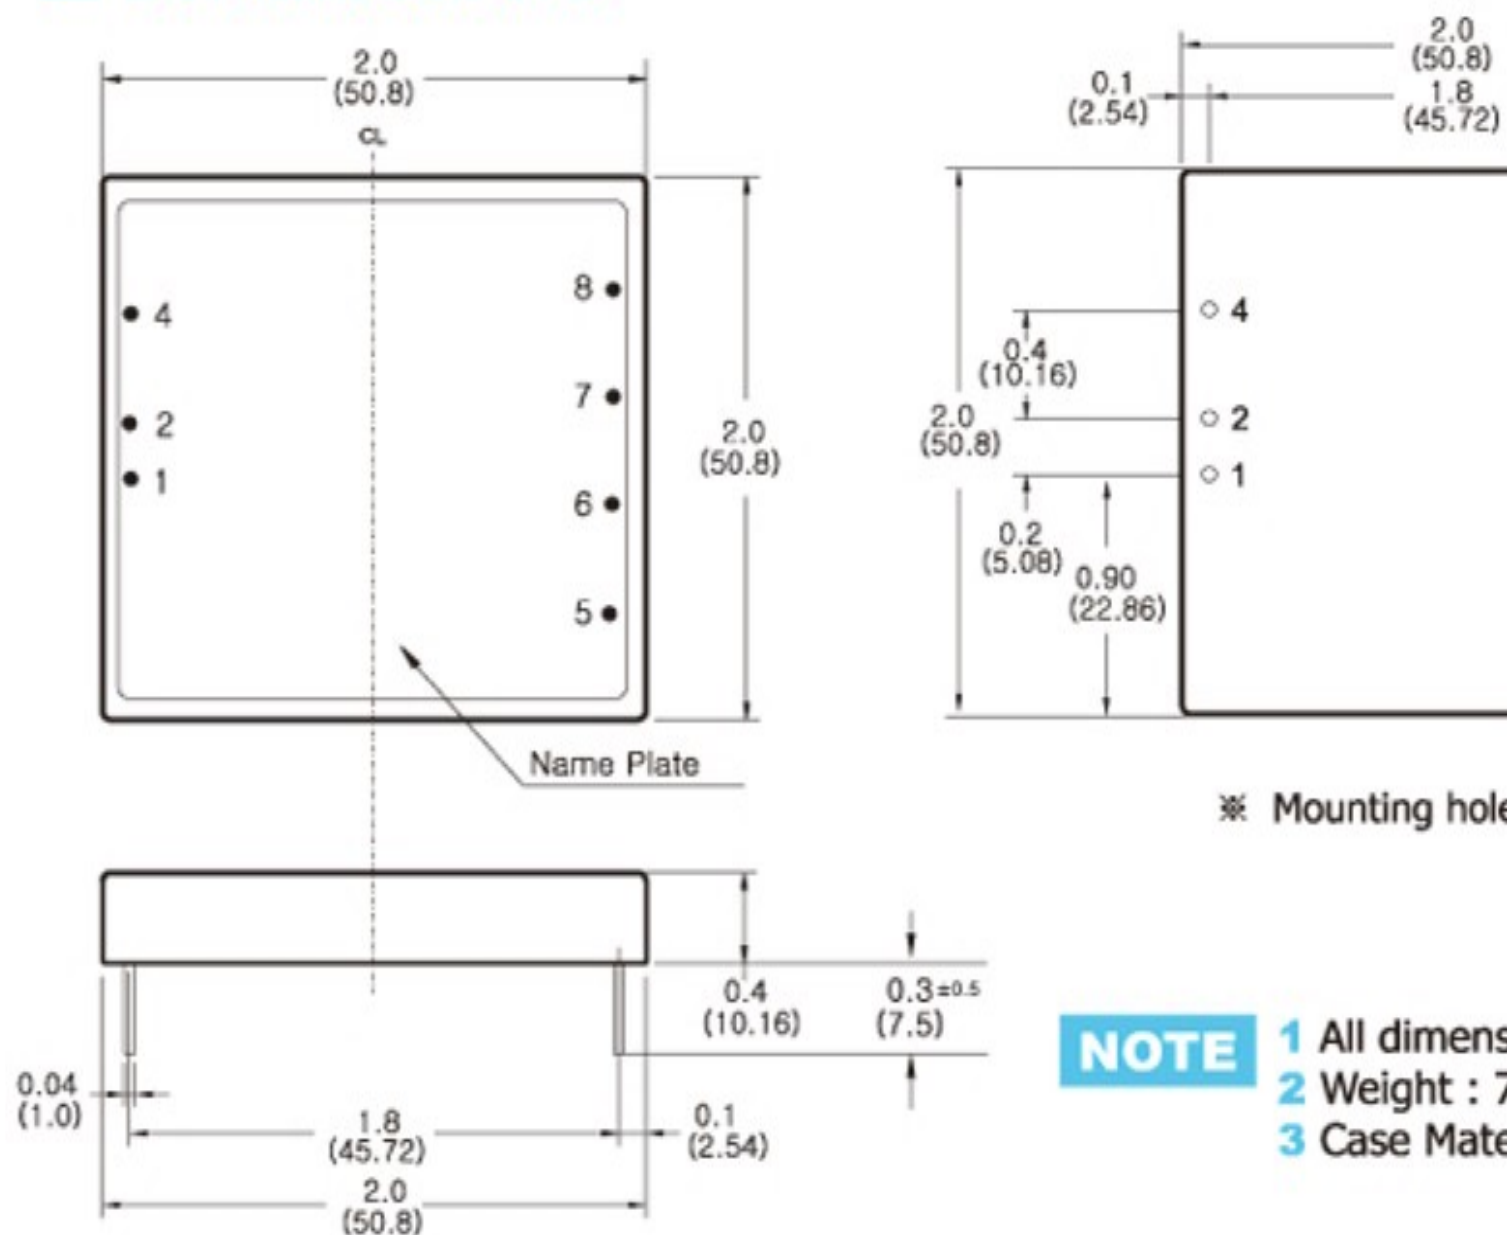

- NOTE**
- 1 All dimensions are in millimeters.
  - 2 Weight : 7.5g
  - 3 Case Material : FR-4