



DP1.5-PE

DIN

>

:2021-09-08

:1.1

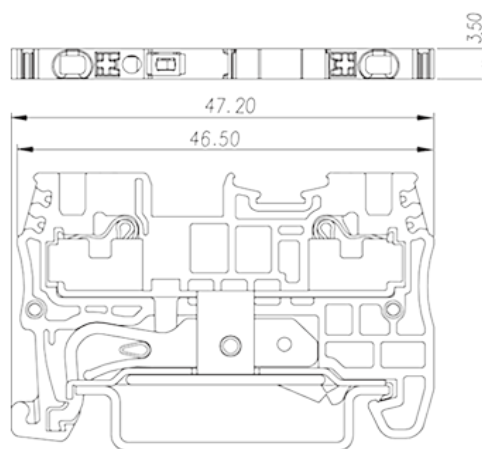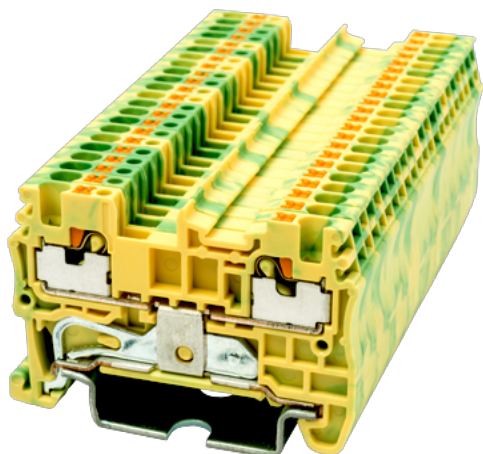

300V, Green-Yellow (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Green-Yellow (default)
	Push-in Design
	Rail Mounting
(mm)	47.2
(mm)	3.5
(mm)	30.6
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		500
(III/3)(KV)		6
(mm ²)		0.14
(mm ²)		1.5
(mm ²)		0.14
(mm ²)		1.5
(mm ²)	,	0.25
(mm ²)	,	1.5
(mm ²)	,	0.25
(mm ²)	,	0.75
Width)(mm)	(Blade thickness x	0.4x2.5
		8
		TS-35
		YES
		YES

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group C)(V)		300
UL/CUL	AWG	26
UL/CUL	AWG	14
UL/CUL	AWG	26
UL/CUL	AWG	14

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

UL



(Group B) (AWG)	26~14
(Group B) (V)	300
(Group C) (AWG)	26~14
(Group C) (V)	300








CUL

(Group B) (AWG)	26~14
(Group B) (V)	300
(Group C) (AWG)	26~14
(Group C) (V)	300

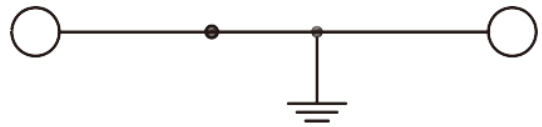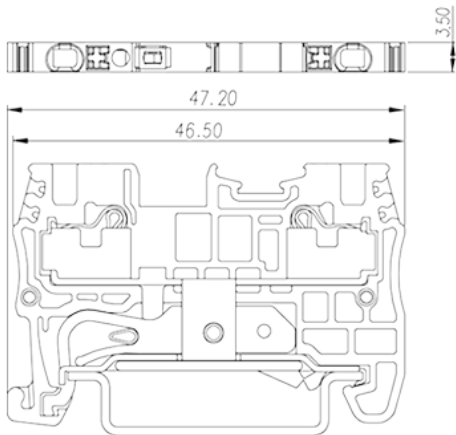VDE

(mm ²)	0.14~1.5
(V)	500



	<p>TS-35C DIN rail end cap For TS-35 rail. Black color. Using UL94-V2 class of insulation material.</p>
	<p>DSD03-1.5XX Plug-in bridge For DP1.5/DP1.5-TR/DP1.5-TN Red color. Using UL94-V0 class of insulation material.</p>
	<p>AKSPS-001 Partition Plate For AK1.5 / AK2.5 / AK4 / DP1.5 / DP2.5 / DP4 Gray color. Using UL94-V0 class of insulation material.</p>
	<p>TS-35 DIN-Rail For DP / DP-PE / DK / DK-PE / AK / AK-PE / AK..P series. Material is iron. Length of 1000mm / 2000mm.</p>
	<p>SS11 End Bracket For TS-35, TS-35/15 rails. Grey color. Using UL94-V0 class of insulation material.</p>
	<p>TM41W Marking Label For DP1.5,DP1.5-TN,DP1.5-TR,DP1.5-PE,DP1.5-TN-PE,DP1.5-TR-PE White color. Using UL94-V2 class of insulation material.</p>
	<p>TM46W Marking Label For DP1.5,DP1.5-TN,DP1.5-TR,DP1.5-PE,DP1.5-TN-PE,DP1.5-TR-PE White color. Using UL94-V2 class of insulation material.</p>
	<p>DP1.5C-YG End Cover</p>



For DP1.5-PE Green-Yellow (default) Using UL94-V0 class of insulation material.