

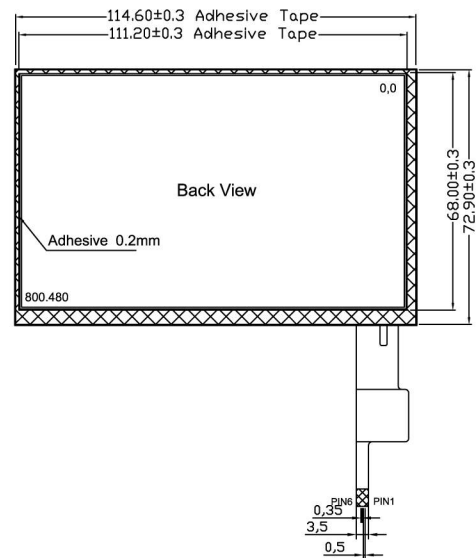


| No. | Rev. | Revision Record | Date |
|-----|------|-----------------|-------------|
| 1 | A00 | First issue | Apr-21-2014 |
| | | | |

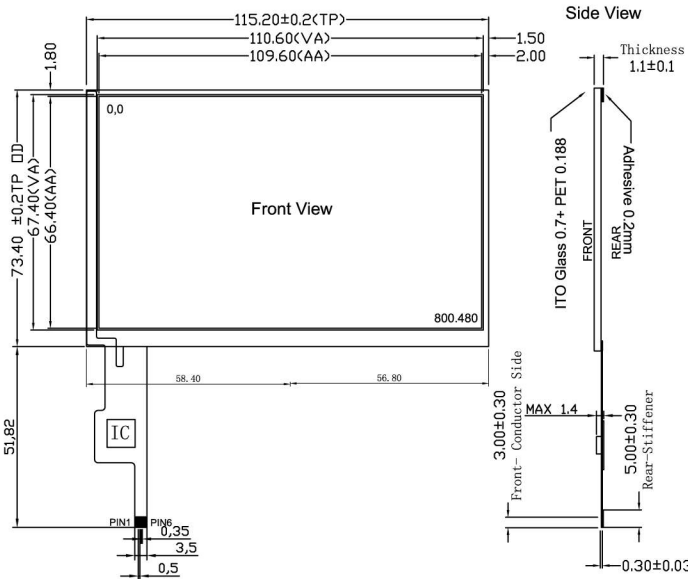

- Specification
1. Operating Voltage: 2.8V-3.3V;
 2. Surface Hardness: >4H;
 3. Transmittance: 86%;
 4. Tolerance: 0.2mm;
 5. RoHS Compliance

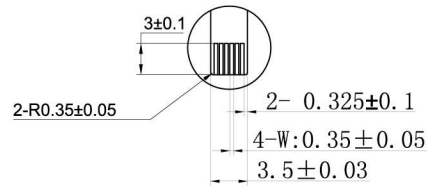

| PIN | Define |
|-----|--------|
| 1 | SCL |
| 2 | SDA |
| 3 | VDD |
| 4 | WAKE |
| 5 | INT |
| 6 | GND |

| 3RD ANGLE | | Model ER-TPC050-1 | | | |
|-------------|-------|-------------------|-----|-------|-------------|
| UNIT | mm | Designed by | QBL | Date | Apr-21-2014 |
| General tol | 0.2mm | Approved by | YXB | Date | Apr-21-2014 |
| Scale | 1 : 1 | Size | A4 | Sheet | 1 of 1 |