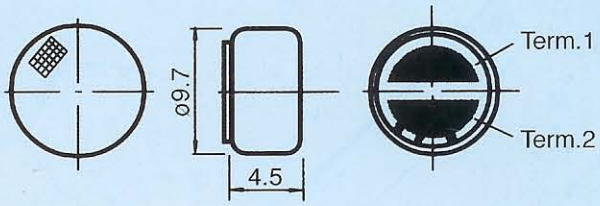
ø9.7
4.5
Term.1
Term.2

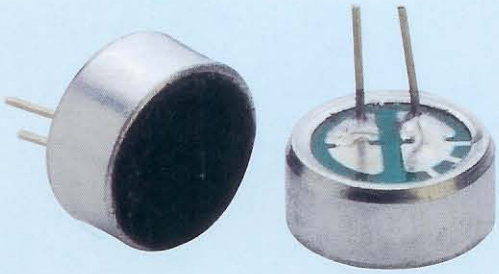

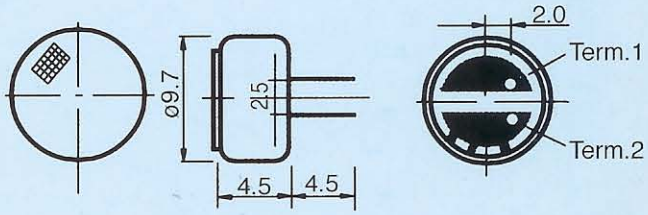
2.0
ø9.7
2.5
4.5
4.5
Term.1
Term.2

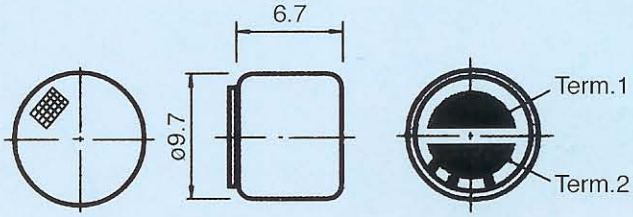
6.7
ø9.7
Term.1
Term.2

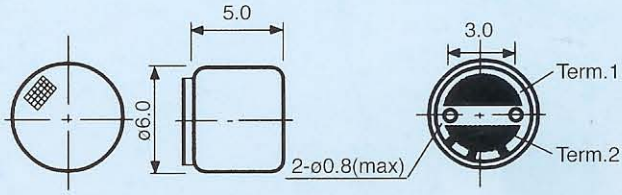
5.0
ø6.0
3.0
Term.1
Term.2
2-ø0.8(max)

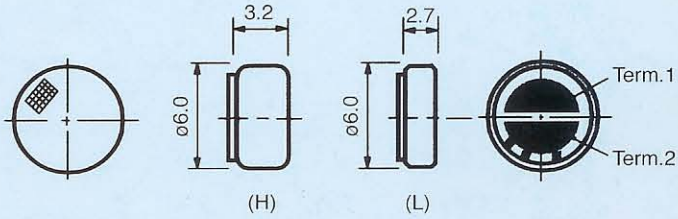
3.2
ø6.0
(H)
2.7
ø6.0
(L)
Term.1
Term.2

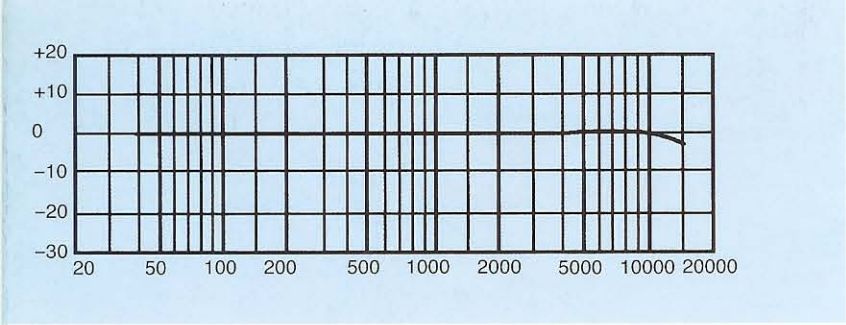

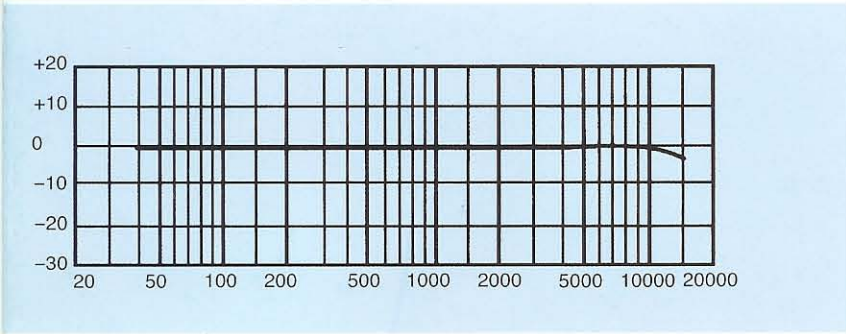

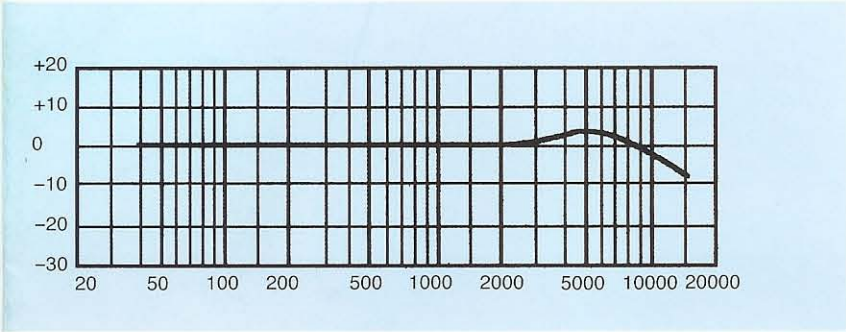

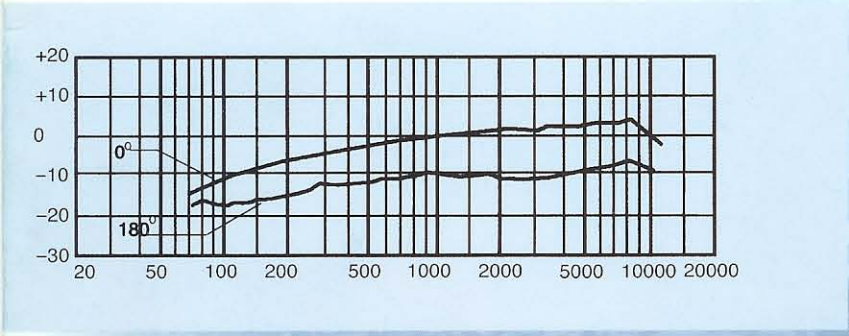

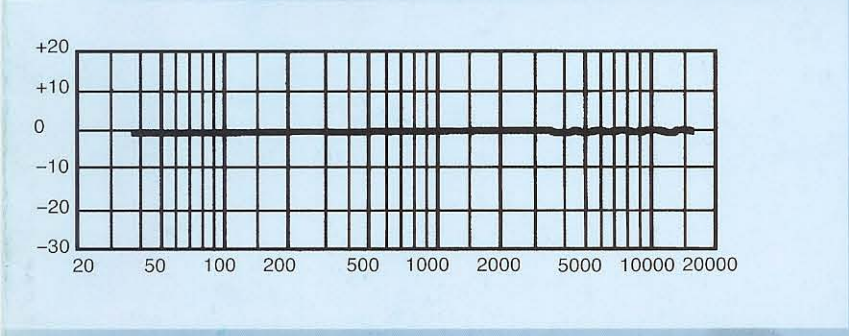

驻极体话筒灵敏度对照表

厂指标	毫 伏	db数
红点A	0.4-0.5	-66db
红点B	0.5-0.6	-64db
红点C	0.6-0.7	-63db
红点D	0.7-0.8	-62db
黄点A	0.8-0.9	-61db
黄点B	0.9-1.0	-60db
黄点C	1.0-1.1	-59.5db
黄点D	1.1-1.2	-59db
低兰A	1.2-1.3	-58.5db
低兰B	1.3-1.4	-58db
低兰C	1.4-1.5	-57db
低兰D	1.5-1.6	-56.5db
高兰A	1.6-1.7	-56db
高兰B	1.7-1.9	-55db
高兰C	1.9-2.1	-54db
高兰D	2.1-2.3	-53.5db
白点A	2.3-2.5	-53db
白点B	2.5-2.8	-52db
白点C	2.8-3.0	-50db
白点D	3.0以上	-48db

Sensitivity: See above (0dB=1V/μb, 1kHz)
Impedance: Low impedance
Directivity: Omnidirectional
Frequency: 50-16, 000Hz
Max. operation voltage: 9V
Standard operation voltage: 4.5V
Current consumption: Max. 0.8mA
Sensitivity reduction: Within-3dB at 3V
S/N ratio: More than 60dB

Sensitivity show melhed:
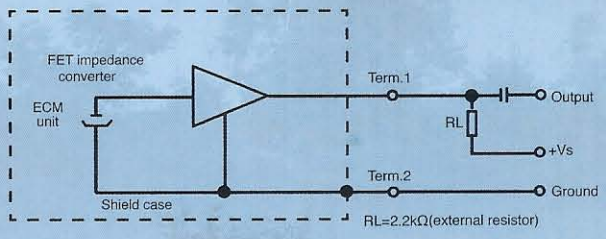
As 1pa=10μb therefore when it be pa or μb shower, that they would be-20dB distance between them. Eeample: -40dB (0dB=1V/pa) be eqnivalent to -60dB (0dB=1V/μb)