


**P.C.B LAYOUT  
TOP VIEW**

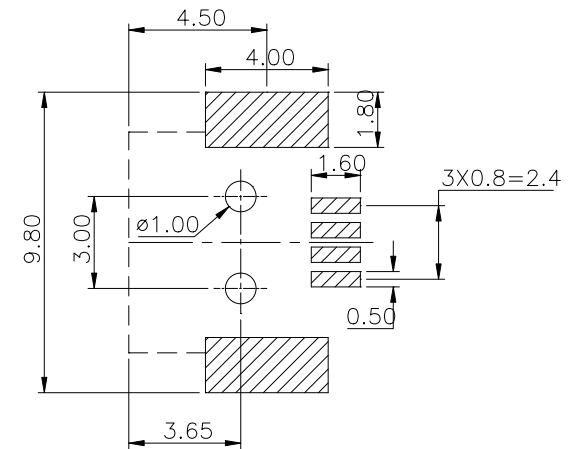

### SPECIFICATION

1. Rating: DC 30V 1A;
2. Contact resistance:  $\leq 30m\Omega$  □
- Roman|b0|i0|c0|p18;;
3. Insulation resistance:  $\geq 500M\Omega$  (DC500V);
4. Withstand voltage: 750VAC ;
5. Action Power: 5-20N;
6. Life test:  $\geq 5,000$  cycles .

3	CONTACT FOOT	4	BRASS	Au-Plating
2	COAT	1	BRASS	Ni-Plating
1	HOUSING	1	PBT/PA66	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4 PAGE 1 OF 1	
	USB JACK	USB-113	TOLERANCE	ANGLES
			0.20	数1.5
			SCALE	VER
			3:1	1
DESIGNER BY:			旭日佳电子有限公司 □ BEST SUN ELECTRONIC CO., LTD	
CHECK BY:				
APPROVED BY:				