



顾客 CUSTOMER		顾客型号 CUSTOMER'S NO	
厂内型号 OUR PART NO.		样品号码 SAMPLE NO.	
		BOX40Y04T20NJ2 3-D100	
NO.	Item	Specification	Condition
1	Dimensions 尺寸	45*99.5*20.6H mm	
2	Nomial Impedance 标称阻抗	4±20% OHM	DCR: 3.2±15%Ω
3	Input power 输入功率	Rated:5W/ Max:6W	At4.47V 4.9V
4	Resonance Frequency 最低共振周波数(Fb)	Fb: 230±20%	At 1.414V
5	S. P. L. 音压位准	73.5±3 dB(0.5W/0.5m)	At0.8K 1.0K 1.2K 1.5KHz (Average)
6	Frepuency Range 有效频宽	F0~20K	Output S.P.L. -10dB
7	Distortion 失真	5%Max	At 1.0KHz 0.1W/0.1m
8	Buzze & Rattle 异常音	Not be audible sine wave between at4.47V /Fo~5KHz. (输入 4.47V 正弦波从 Fo 到 5KHz 无异常音)	
9	Polarity 极性	Diaphragm shall move forward. (端子的正极通入电流, 振膜振动方向向前)	
10	Load test 连续负荷测试	Must be normal after load test:white noise 48 hours. (白噪声连续 48 小时试验后无异常的不良)	
11	High TEMP test 耐热试验	After having been in a test chamber for 48 hours at the condition of +60℃ 20~25%R.H and keep 2 hours.(+60℃ 20~25%R.H, 48 小时试验常温 2 小时后, 无异常的不良)	
12	Cold TEMP test 耐寒试验	After having been in a test chamber for 48 hours at the condition of -25℃±3℃ and keep 2 hours.(-25℃±3℃, 48 小时试验常温 2 小时后, 无异常的不良)	
13	Humidity test 耐湿试验	After having been in a test chamber for 48 hours at the condition of +40℃ 90~95%R.H and keep 4 hours. (+40℃ 90~95%R.H, 48 小时试验常温 4 小时后, 无异常的不良)	
14	Drop test 跌落试验	The speak shall be dropped 2 times as shown the figure, clause 8 shall be satisfied. (如右图示 2 次跌落满足异常音试验无异常)	
15	Weld 焊接条件	terminal weld: 350℃/≤3~5sec*2bit. (端子焊接不超过 3~5 秒)	
16	Store temp 储存温度	-20℃ To +60℃	
APPROVEN BY: 陈永红		CHECKED BY: 谭梦江	DRAWING BY: 彭奇



19. APPEARANCE DRAWING 外观尺寸图

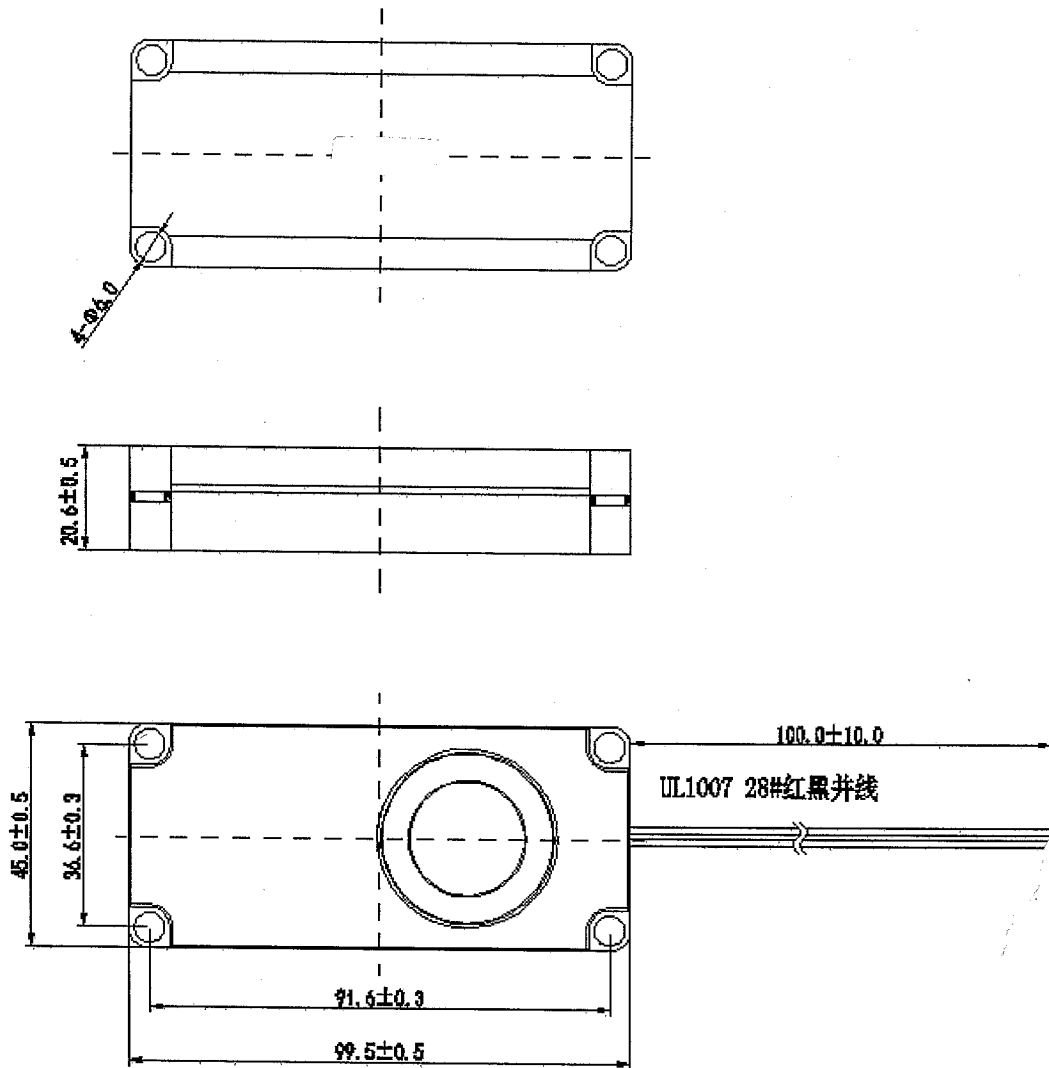

公差 TOL	如图	单位 UNIT	mm					顾客 CUSTOMER			
重量 N. G		比例 SCALE	1:1					机种名称 PART NO.	BOX40Y04T20NJ23-D100		
	日期 DATE	说明 REVISE	日期 DATE	2020-11-07	版本号	1.0	图番 DRAWING NO.				
1.			(주)가나웨이브시스					核准	审核	制图	
2.								陈永红	谭梦江	彭奇	
3.											