
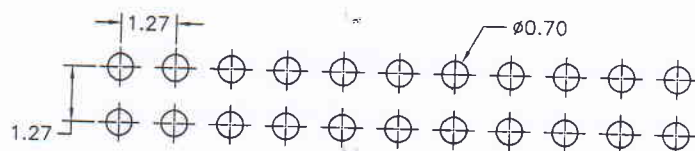
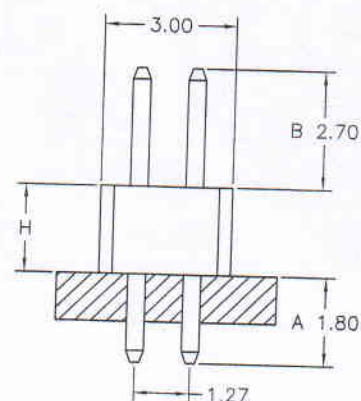
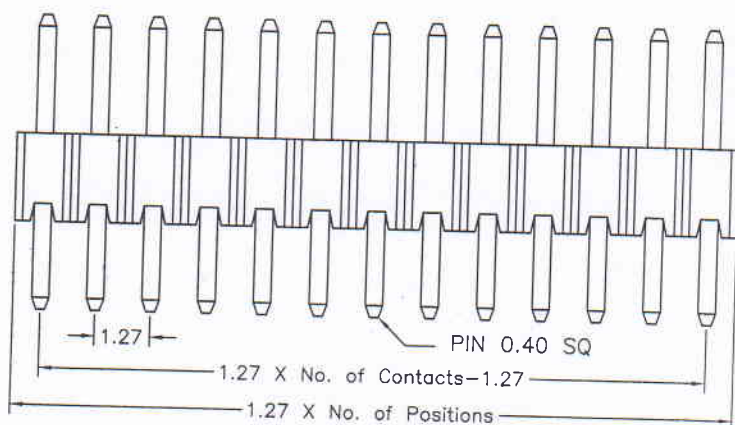



1.27mm Pin Header, Dual Row, Straight/Right Angle

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn Over 50u" Ni

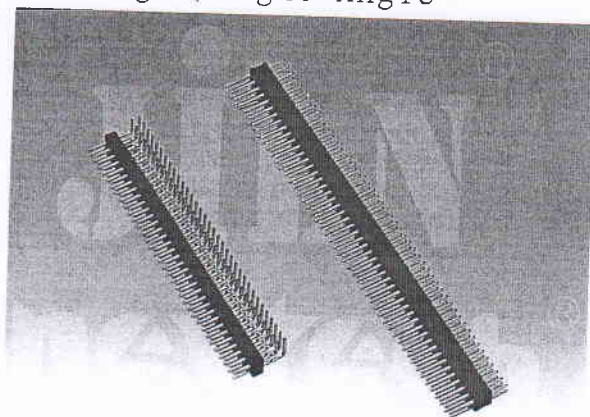

PCB LAYOUT

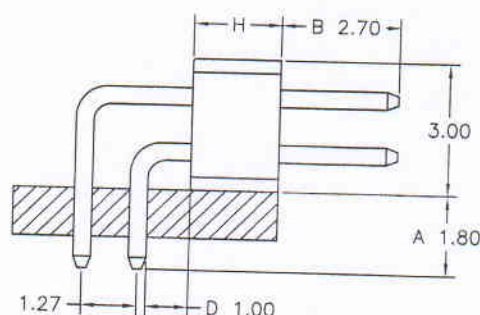

Ordering Information

1420	5	XX	G0	X	S	XXX	01
Plastics Height H=0.65mm H=1.6mm H=2.0mm H=2.54mm	No. of Pins Per Row 2x50 2~100	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	Insulator Material Option A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special	Connector Type S= Straight R= Right Angle	Pin Length XXX= A+B+H XXX= A+D+H+B+0.86		