



P. C. B LAYOUT
TOP VIEW

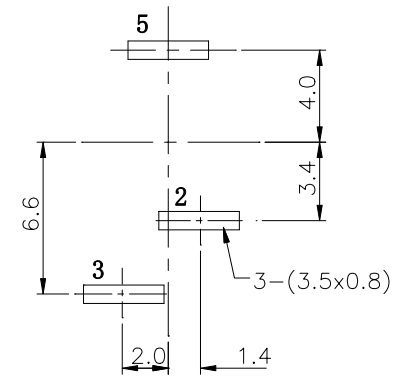

SCHEMATIC



PIN	ø2.0	ø2.35	ø2.5
APPD.			

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

6	COVER	1	PF	
5	CONTACT FOOT	1	BRASS	Sn-Plating
4	PIN	1	H59 BRASS	Ni-Plating
3	SPRING	1	SUS301	Sn-Plating
2	FLAT PIECE	1	H62 BRASS	Sn-Plating
1	HOUSING	1	ABS	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	DC JACK	DC-015	TOLERANCE	ANGLES
			0.15	数1.5
			SCALE	VER
			3:1	1

DESIGNER BY:
CHECK BY:
APPROVED BY:



旭日佳电子有限公司
BEST SUN ELECTRONIC CO., LTD