



P. C. B LAYOUT

TOP VIEW

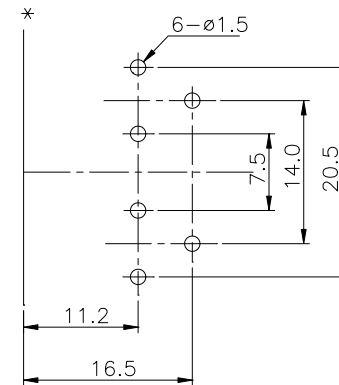

SCHEMATIC



SPECIFICATION

1. Rating : 50V 0.3A;
2. Contact resistance: $d0.03\Omega$;
3. Insulation resistance: $e100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles.

4	CONTACT FOOT	6	BRASS	Sn-Plating			
3	AXIS SUPPORT	4	ABS				
2	AXIS SUPPORT	4	BRASS	Ni-Plating			
1	HOUSING	1	ABS				
NO.	DESCRIPTION	QTY	MATERIAL	PLATING			
UNIT: MM		TYPE:		MODEL NO:			
		RCA JACK		PAPER NO: A4		PAGE 1 OF 1	
				TOLERANCE	ANGLES	SCALE	VER
				0.15	1.5	4:3	1
DESIGNER BY:				旭日佳电子有限公司 □ BEST SUN ELECTRONIC CO., LTD			
CHECK BY:							
APPROVED BY:							